

## FEATURES:

- LOW INSERTION LOSS
- HIGH REJECTION
- LIGHT WEIGHT

## ELECTRICAL CHARACTERISTICS:



- Center Frequency: 1880 MHz
  - Passband: 60 MHz
  - Insertion Loss: 1.0 dB max.
  - Passband Ripple: 0.3 dB p-p, max.
  - Return Loss: 18 dB
  - Rejection: 60 dB @ 1825 & 1930 MHz
  - Power: 100 W CW
  - Operating Temperature Range: -40°C to +70°C
  - Relative Humidity: 10 to 95% non-condensing
- Specifications are subject to change for continuous improvement.

## NEW PRODUCT RELEASE



## MECHANICAL CHARACTERISTICS:

- Dimensions are in inches (millimeters)
- Interface: SMA-Female
- Finish: Silver Plate Per QQ-S-365, Type II, Grade A, paint MWTG green.
- Material: Aluminum 6061T6

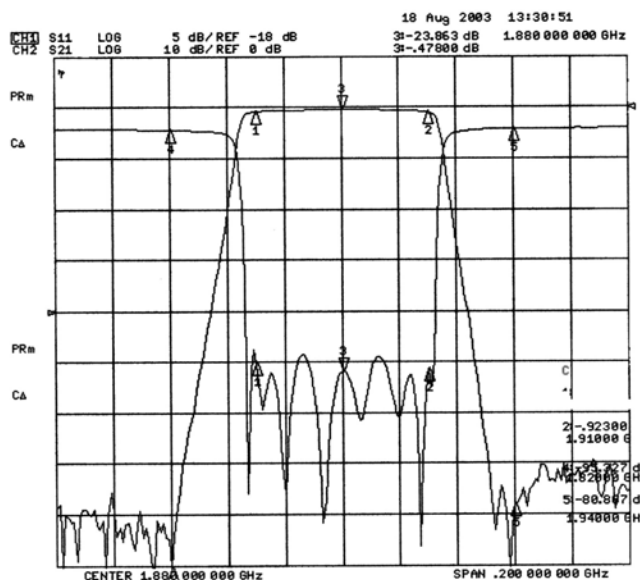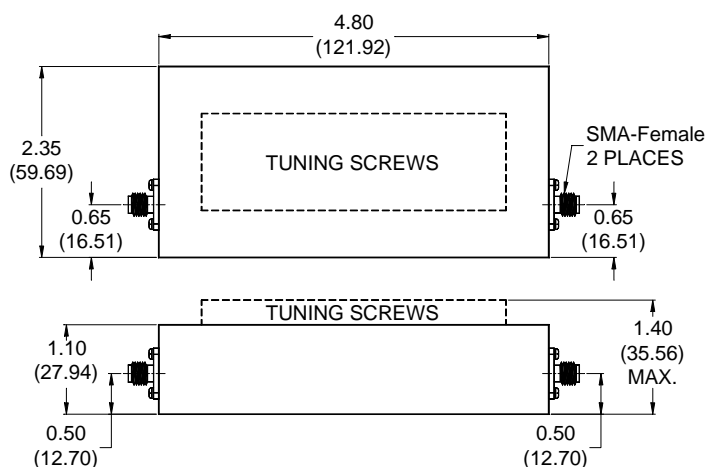

**Passband Response**