

## FEATURES:

- LOW INSERTION LOSS
- HIGH REJECTION
- LIGHT WEIGHT

## ELECTRICAL CHARACTERISTICS:



- Center Frequency: 1500 MHz
  - Passband: 25 MHz
  - Insertion Loss: 1.0 dB max.
  - Return Loss: 18 dB
  - Rejection: 60 dB @ 1450 MHz  
40 dB @ 1550 MHz
  - Operating Temperature Range: -40°C to +70°C
- Specifications are subject to change for continuous improvement.

## NEW PRODUCT RELEASE



## MECHANICAL CHARACTERISTICS:

- Dimensions are in inches (millimeters)
- Interface: SMA-Female
- Finish: Silver Plate Per QQ-S-365, Type II, Grade A, paint MWTG green.
- Material: Aluminum 6061T6

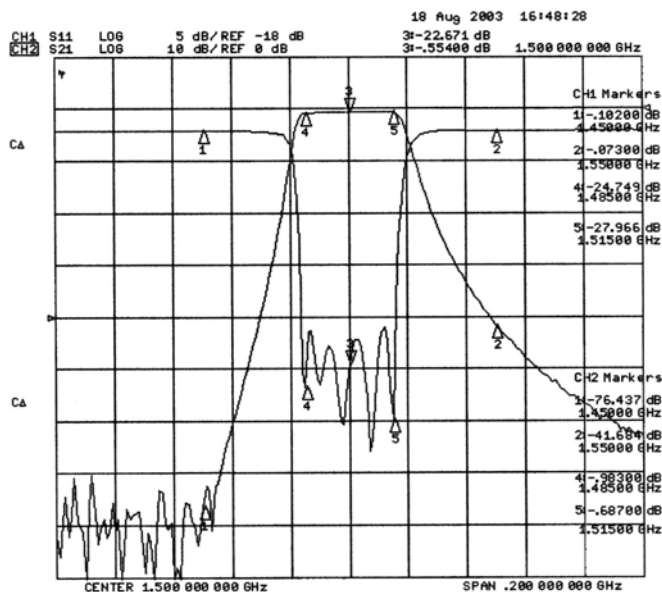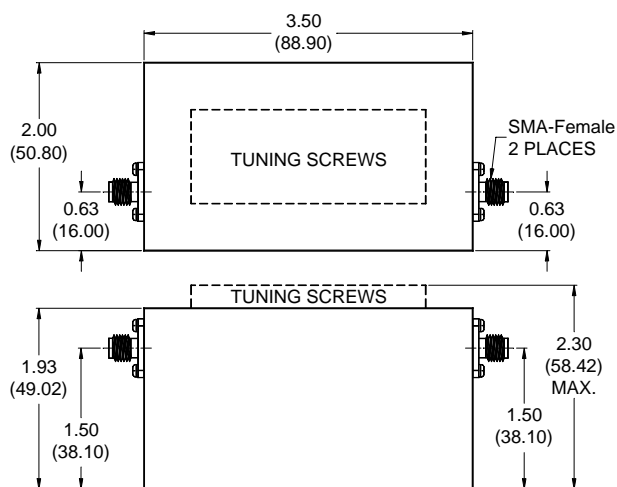

Passband Response