4-WAY POWER DIVIDER

Model No. AX04-0704

FEATURES:

- MINIATURE SIZE
- LOW VSWR
- HIGH ISOLATION
- EXCELLENT AMPLITUDE TRACKING
- R.F. SHIELDED
- QUALIFIED TO MIL-E-5400 AND MIL-STD-2036
- EXCELLENT AMPLITUDE TRACKING

ELECTRICAL CHARACTERISTICS:

Operating Frequency Range	1.500 to 3.000 GHz
Isolation	20 dB min.
Input VSWR	1.30:1 dB max.
Output VSWR	1.25:1 dB max.
Insertion Loss	0.60 dB max.
Amplitude Balance	0.30 dB max.
Phase Balance	5.0 degrees max.
Operating Temperature Range	-30°C to +70°C

Specifications subject to change without notice.

MECHANICAL CHARACTERISTICS:

a) Dimensions are in inches (millimeters)
b) Interface: SMA-Female, Passivated Stainless Steel
c) Finish: Chemical Conversion Coating per MIL-C-5541 Class 1A
d) Material: Alum. 6061T6

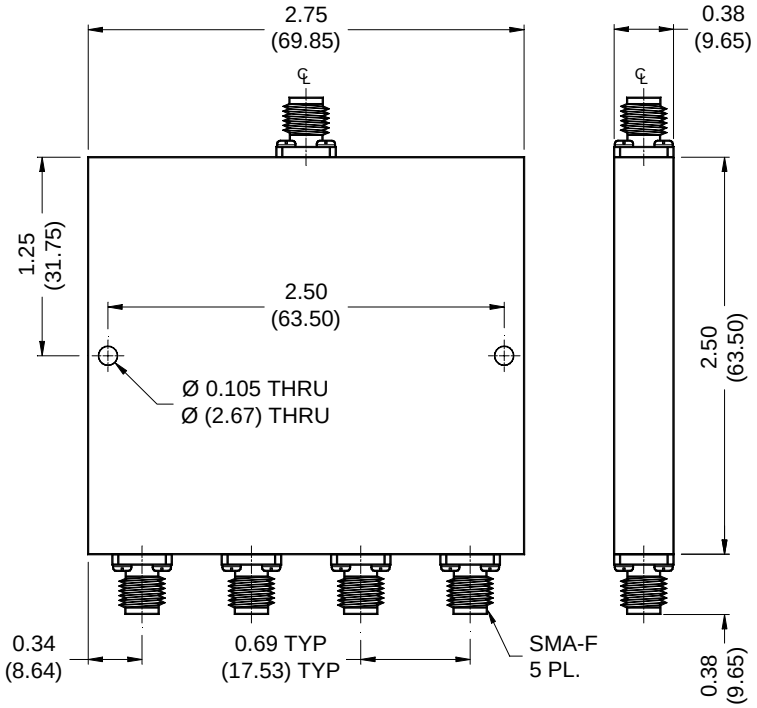

TSI ● 2459 46th Avenue, Lachine, (Québec) Canada, H8T 3C9 ● Tel.: 514.631.8837
e-mail: info@trackcom-sys.ca www.trackcom-sys.ca